

SINGLE BAND PANEL ANTENNA BAND 700 MHz

AT39-684TX

698 - 896

H67° V8°

Fixed Tilt 0°, 2°, 4°, 6°


ELECTRICAL SPECIFICATIONS

BAND 700

Antenna Model	AT39-684TX
Polarization	± 45°
Frequency (MHz)	698-896
Horizontal Beamwidth	67°
Vertical Beamwidth	8°
Gain (dBi)	16.7
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 st lobe above main beam (dB)	17
Front-to-Back Ratio @ 180° ± 20° (dB)	30
VSWR	< 1.4 : 1
Cross Polar Ratio @ ± 60° (dB) <i>Typically</i>	10
Isolation Between Ports	> 30
Maximum Power Per Input (W)	500
Intermodulation (dBc)	< -150
Impedance (Ω)	50

MECHANICAL SPECIFICATIONS

Connectors	2 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	1350 (303)
Lateral Windload N @ 160 km/h (lbs @100 mph)	270 (61)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	22 (48)
Antenna Dimension mm (in) H X W X D	2530 X 325 X 115 (100 X 13 X 5)

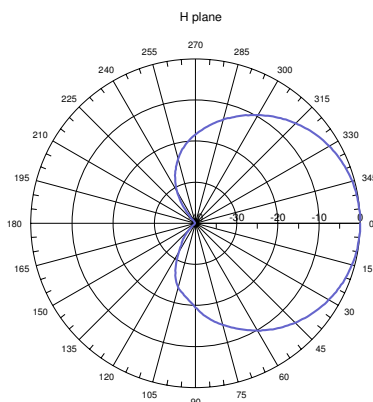

H&V Pattern

