

SINGLE BAND PANEL ANTENNA

BAND 800 + 900 MHz

AT40-646TX


790 - 960	
790 - 896	870 - 960
H92° V15.5°	H87° V14.8°
Fixed Tilt 0°, 2°, 6°, 8°	Fixed Tilt 0°, 2°, 6°, 8°

ELECTRICAL SPECIFICATIONS

	BAND 800	BAND 900
Antenna Model	AT40-646TX	
Polarization	± 45°	± 45°
Frequency (MHz)	790 - 896	870 - 960
Horizontal Beamwidth	92°	87°
Vertical Beamwidth	15.5°	14.8°
Gain (dBi)	13.1	13.6
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 st lobe above main beam (dB)	17	17
Front-to-Back Ratio /Cpol @ ± 20° (dB)	> 23	> 23
VSWR	< 1.5 : 1	< 1.5 : 1
Cross Polar Ratio @ ± 60° (dB) <i>Typically</i>	> 12	> 12
Isolation Between Ports	> 30	> 30
Maximum Power Per Input (W)	500	500
Intermodulation (dBc)	< - 150	< - 150
Impedance (Ω)	50	50

MECHANICAL SPECIFICATIONS

Connectors	2 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	670 (150)
Lateral Windload N @ 160 km/h (lbs @100 mph)	130 (30)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	13 (28)
Antenna Dimension mm (in) H X W X D	1340 X 325 X 125 (53 X 13 X 5)

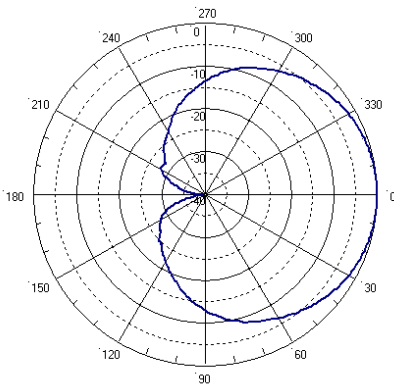

H&V Pattern

