

# SINGLE BAND PANEL ANTENNA

## BAND 800 + 900 MHz

### AT40-666TX

790 - 960	
790 - 896	870 - 960
H92° V10.5°	H87° V10.1°
Fixed Tilt 0°, 2°, 4°, 8°	Fixed Tilt 0°, 2°, 4°, 8°

#### ELECTRICAL SPECIFICATIONS


BAND 800

BAND 900

Antenna Model	AT40-666TX	
Polarization	± 45°	± 45°
Frequency (MHz)	<b>790 - 896</b>	<b>870 - 960</b>
Horizontal Beamwidth	92°	87°
Vertical Beamwidth	10.5°	10.1°
Gain (dBi)	14.7	15.1
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 <sup>st</sup> lobe above main beam (dB)	17	17
Front-to-Back Ratio @180° ± 20° (dB)	> 25	> 25
VSWR	< 1.5 : 1	< 1.5 : 1
Cross Polar Ratio @ ± 60° (dB) <i>Typically</i>	> 10	> 10
Isolation Between Ports	> 30	> 30
Maximum Power Per Input (W)	500	500
Intermodulation (dBc)	< - 150	< - 150
Impedance (Ω)	50	50

#### MECHANICAL SPECIFICATIONS

Connectors	2 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	1045 (235)
Lateral Windload N @ 160 km/h (lbs @100 mph)	205 (46)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	18 (39)
Antenna Dimension mm (in) H X W X D	1985 X 325 X 115 (78 X 13 X 5)

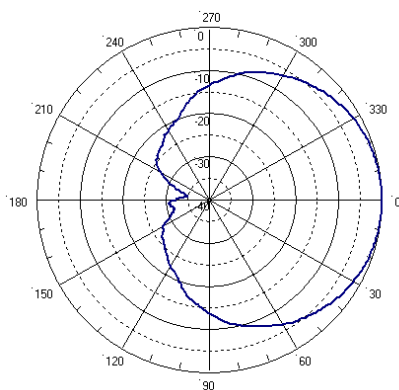

H&V Pattern

