

# SINGLE BAND PANEL ANTENNA

## BAND 850 MHz

### AT41-646TX

824 - 896
H88° V15.3°
Fixed Tilt 0°, 2°, 4°, 6°

#### ELECTRICAL SPECIFICATIONS


BAND 850

Antenna Model	AT41-646TX
Polarization	± 45°
Frequency (MHz)	<b>824 - 896</b>
Horizontal Beamwidth	88°
Vertical Beamwidth	15.3°
Gain (dBi)	13.5
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 <sup>st</sup> lobe above main beam (dB)	18
Front-to-Back Ratio /Cpol @ ± 20° (dB)	> 23
VSWR	< 1.4 : 1
Cross Polar Ratio @ ± 60° (dB) <i>Typically</i>	> 12
Isolation Between Ports	> 30
Maximum Power Per Input (W)	500
Intermodulation (dBc)	< - 150
Impedance (Ω)	50



#### MECHANICAL SPECIFICATIONS

Connectors	2 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	670 (150)
Lateral Windload N @ 160 km/h (lbs @100 mph)	130 (30)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	12 (26)
Antenna Dimension mm (in) H X W X D	1340 X 325 X 115 (53 X 13 X 5)

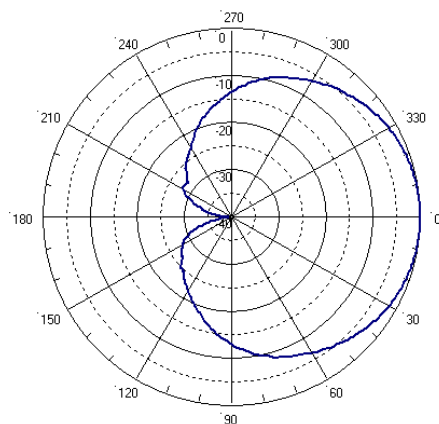

H&V Pattern

