

SINGLE BAND PANEL ANTENNA

BAND 850 MHz


AT41-683TX

824 - 896
H64° V7.6°
Fixed Tilt 0°, 2°, 4°, 6°

ELECTRICAL SPECIFICATIONS


BAND 850

Antenna Model	AT41-683TX
Polarization	Vertical
Frequency (MHz)	824 - 896
Horizontal Beamwidth	64°
Vertical Beamwidth	7.6°
Gain (dBi)	17.1
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 st lobe above main beam (dB)	18
Front-to-Back Ratio @ 180° ± 20° (dB)	> 30
VSWR	< 1.4 : 1
Maximum Power Per Input (W)	500
Intermodulation (dBc)	< - 150
Impedance (Ω)	50

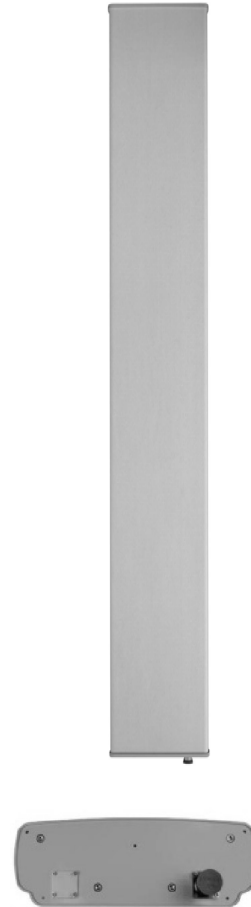

MECHANICAL SPECIFICATIONS

Connectors	1 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	1350 (303)
Lateral Windload N @ 160 km/h (lbs @100 mph)	270 (61)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	22 (48)
Antenna Dimension mm (in) H X W X D	2530 X 325 X 115 (100 X 13 X 5)

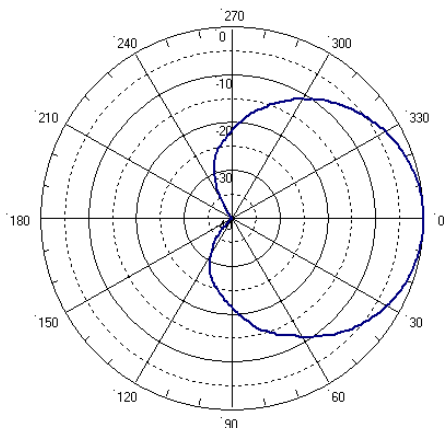

H&V Pattern

