

SINGLE BAND PANEL ANTENNA

BAND 900 MHz

AT42-664TX

870 - 960
H64° V10.5°
Fixed Tilt 0°, 2°, 4°, 6°

ELECTRICAL SPECIFICATIONS


BAND 900

Antenna Model	AT42-664TX
Polarization	± 45°
Frequency (MHz)	870 - 960
Horizontal Beamwidth	64°
Vertical Beamwidth	10.5°
Gain (dBi)	16.8
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 st lobe above main beam (dB)	22
Front-to-Back Ratio @ 180° ± 20° (dB)	> 30
VSWR	< 1.4 : 1
Cross Polar Ratio @ ± 60° (dB) <i>Typically</i>	> 10
Isolation Between Ports	> 30
Maximum Power Per Input (W)	500
Intermodulation (dBc)	< - 150
Impedance (Ω)	50



MECHANICAL SPECIFICATIONS

Connectors	2 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	1045 (235)
Lateral Windload N @ 160 km/h (lbs @100 mph)	205 (46)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	18 (40)
Antenna Dimension mm (in) H X W X D	1985 X 325 X 115 (78 X 13 X 5)

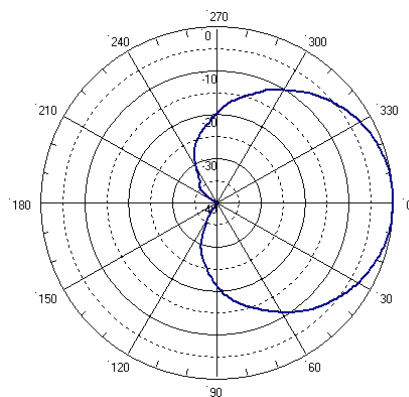

H&V Pattern

